

# Customer First! STARION is here to serve customers.

A product just for you to make you even more special! STARION Technology with 5 Decades of History! It will make you even more special.



### STARION www.starion.co.kr

STARION Service Center

The information within this catalogue is prepared to help customers better understand the features of the products. The contents are subject to change depending on the future market trends and release dates; thus, it is strongly advised to verify the product information through product manuals and with salespersons at stores when purchasing the product. The colors of the products in this catalogue may vary from the actual products due to technicalities during the printing process.

All unauthorized use of any information within this catalogue is subject to civil and criminal offenses pursuant to the Copyright Act.

Any unauthorized reproductions and duplications are strictly prohibited.

Quality Satisfaction Awards and Good Design Award are based on Korea standards

November, 2016





#### 1 year-long electricity bill at a mere

approx. USD 109.52 67% more savings on the electricity bill compared

to equivalent models from competitors (Based on SR-S45A\* model, measurements from the test conducted by the company with ISO5502 Standards)



#### User-friendly drainage structure

All watery fluid is designed to be gathered at the front because the rear-side surface is 1 degree higher than ne front-side surface in addition to separate waterways This feature allows easy drainage and cleaning without having to remove food materials from the refrigerator.



#### Design of Inner Materials with Stainless Steel

High-end stainless steel materials ensure convenient



4363

#### Instant Freezing

The feature runs freezing operation for 2 hours and automatically shuts off by simply pressing a button. It assures easy and prompt cold storage of food materials

Don't worry. The refrigerator is properly

High-density polyurethane foam The thickness of polyurethane foam varies at each

working right now. (Based on SR-S25D\* model)

section based on the researches upon optimal

nize heat loss and secure maximum storage spac

hickness of polyurethane foam in order to



#### Frost Removal Feature

This feature removes frost which is generated every time the door opens and shuts. It enhances preservation and usability of food materials



#### Height-adjustable Shelves

With height-adjustable shelves, the space inside the efrigerator can be fully utilized depending on the size and volume of food materials to store.



#### Easy-to-use Temperature Control Unit With a special sensor, temperature can be easily

controlled in addition to convenience of temperature verification; and it also preserves the freshness of food materials at optimal condition for long durations.

#### Application of LG Compressor with

Armed with a powerful LG Compressor, it provides



#### More Spacious Storage Space without Bottle Rails

By removing the rails for bottles, it offers more space to store food materials.



### Powerful Freezing Capability

No need to worry about fungus since STARION

Automatic Door-Shut within 45 degrees

Automatic door-shut feature ensures the door to

be closed within 45 degrees, which is a must-have

nmercial refrigerator is completely free of silicon.

ever-powerful refrigeration and freezing functions.

### **STARION** | Commercial Refrigerator

### 1100l/38.8 cu.ft. 45Box-Metal





	Туре	Model	Mat	erial	Dimension	Weight	Сар	acity(l/c	u.ft.)	Temperat	ure Range	Power Consumption
	туре	Middei	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Freezer Chamber	Refrigeration Chamber	Total	Freezer Chamber	Refrigeration Chamber	(kWh/M)
letion ferior	1100ℓ / 38.8 cu.ft.	SR-S45AI**	Metal	STS	1,260x805x1,909	157 346	240	830	1,070	6-level Temperature Control	6-level Temperature Control	63.0
Way and	1/4 Freezer	SR-S45AS**	STS	313	49.6"x31.7"x75.2"	153 337	8.5	29.3	37.8	(-11°F ~ 41°F) (-24°C ~ 5°C)	(23°F ~ 44.6°F) (-5°C ~ 7°C)	03.0
integral integral	1100ℓ / 38.8 cu.ft. 1/2 Freezer	SR-S45BI**	Metal	STS	1,260x805x1,909	147 324	530	530	1,060	6-level Temperature Control	6-level Temperature Control	80.0
larley larger	(Vertical)	SR-S45BS**	STS	313	49.6"x31.7"x75.2"	145 320	18.7	18.7	37.4	(-11°F ~ 41°F) (-24°C ~ 5°C)	(23°F ~ 44.6°F) (-5°C ~ 7°C)	00,0
-	1100ℓ / 38.8 cu.ft. 1/2 Freezer	SR-S45CI**	Metal	STS	1,260x805x1,909	145 320	532	541	1,073	6-level Temperature Control	6-level Temperature Control	86.0
Refige Refige 1800 1800	(Horizontal)	SR-S45CS**	STS	313	49.6"x31.7"x75.2"	141 311	18.8	19.1	37.9	(-11°F ~ 41°F) (-24°C ~ 5°C)	(23°F ~ 44.6°F) (-5°C ~ 7°C)	80.0
inte late	1100ℓ / 38.8 cu.ft.	SR-S45DI**	Metal	CTC	1,260x805x1,909	140 309	1,110		1,110	6-level Temperature Control		2722
	All Freezer	SR-S45DS**	STS	STS	49.6"x31.7"x75.2"	138 304	39.2	-	39.2	(-11°F ~ 41°F) (-24°C ~ 5°C)		N/A
Retrop lartops stice stice	1100ℓ / 38.8 cu.ft.	SR-S45EI**	Metal	CTC	1,260x805x1,909	124 273		1,110	1,110		6-level Temperature Control	*
Anthor latter	All Refrigeration	SR-S45ES**	STS	STS	49.6*x31.7*x75.2*	120 265	-	- 39.2	39.2	-	(23°F ~ 44.6°F) (-5°C ~ 7°C)	35.0

<sup>\*</sup> STS = Stainless Steel / Power Consumption = Korean Standards

#### 1700ℓ/60 cu.ft. 65Box



### Easy-to-assemble Refrigerator TWO refrigerators can become One massive refrigerator! 77

	Tuno	Model	Mate	erial	Dimension	Weight	Cap	acity(ℓ/cι	ı.ft.)	Temperat	ure Range	Power Consumptio
	Туре	Model	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Freezer Chamber	Refrigeration Chamber	Total	Freezer Chamber	Refrigeration Chamber	(kWh/M)
top top	1700ℓ / 60 cu.ft.	SR-S65Bl**	Metal STS		1,900x805x1,909	212 346	500	1,110	1,610	6-level Temperature Control	6-level Temperature Control	98.0
telica Relica saca saca	1/3 Freezer	SR-S65BS**	STS	313	74.8"x31.7"x75.2"	204 337	17.7	39.2	56.9	(-11°F ~ 41°F) (-24°C ~ 5°C)	(23°F ~ 44.6°F)	90.0
near linear linear	1700ℓ / 60 cu.ft.	SR-S65DI**	Metal	STS	1,900x805x1,909	228 503	1,610	- 1	1,610	6-level Temperature Control		AL/A
inter four	All Freezer	SR-S65DS**	STS	313	74.8"x31.7"x75.2"	222 489	56.9	_	56.9	(-11°F ~ 41°F) (-24°C ~ 5°C)	_	N/A
Wing Being Being	1700& / 60 cu.ft. Refrigeration	SR-S65El**	Metal	CTC	1,900x805x1,909 74.8*x31.7*x75.2*	210 463	-	1,610	1,610		6-level Temperature Control	49.0
Settings Settings nation settings		SR-S65ES**	STS	STS		204 450		56.9			_	(23°F ~ 44.6°F) (-5°C ~ 7°C)

<sup>\*</sup> STS = Stainless Steel / Power Consumption = Korean Standards

#### **STARION** 500l/17.7 cu.ft. 25Box

				Model	Mate	erial	Dimension	Weight	Capacity(l/cu.ft.)		
			Type	Model SR-S25Al**	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Freezer Chamber	Refrigeration Chamber	Total
-	640. B05		500ℓ / 17.7 cu.ft.	SR-S25AI**	Metal	CTC	640x805x1.909	85/187	244	240	484
	577-1382 577-544	100	1/2 Freezer	SR-S25AS**	5AS** STS		25.2"x31.7"x75.2"	83/183	8.6	8.5	17.1
	640		500ℓ / 17.7 cu.ft.	SR-S25DI**	Metal	CTC	640x805x1,909	83/183	500 17.7	-	500
	1,809		All Freezer	SR-S25DS**	STS	STS	25.2"x31.7"x75.2"	79/174			17.7
	Trans.	and the second	500ℓ / 17.7 cu.ft.	SR-S25El**	Metal	STS	640x805x1,909	81/179		500	500
51 16	100 3.9° Product Dinerson (mm/m/l)	arty size arty size	Refrigeration	SR-S25ES**	STS	313	25.2"x31.7"x75.2"	79/174		17.7	17.7

STS = Stainless Steel

02 | Commercial refrigerator Commercial refrigerator | 03

### **STARION** | Table Refrigerator



Right-side Grip

#### STARION W900 / 35.4" Table Refrigerator



STARION

			Produc	100 3 9° t Dimension (mm/lnch)]							(Product Dimens	100.57 100.17	
			200	124 1801	Mate	erial	Dimension	Weight	Ca	pacity(l/cu.ft.	)	Temperature Range	6
ı			ype	Model	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Upper Storage	Inner Storage Space	Total	Refrigeration Chamber	Remark
	_			SR-T09EIE**	Metal			54					Left-side Grip
	0	Refrige	W900 / 35.4"	SR-T09EIF**	ivicual	STS	900X700X850	119					Right-side G
	1	ration	Table	SR-T09ESE**	STS	0.0	35.4"x27.6"x33.5"	51					Left-side Grip
				SR-T09ESF**	313			112		167	167	Control by a single unit (23"F ~ 50"F)	Right-side Gr
	727	W1000 / 30 A"	SR-T10EIE**	Metal			56	-	5.9	5.9	(-5°C~10°C)	Left-side Grip	
	Refrige ration	W1000/39.4"	SR-T10EIF**		STS	1,000X700X850	123					Right-side G	
	- 1111	lations	(Customized)	CD TIOCCE	_	212	39 4"v27 6"v33 5"						Laft side Cale

#### STARION W1200 / 47.2" Table Refrigerator Freeze

SR-T10ESF\*\*



	Туре	Model	Mate	erial	Dimension	Weight	Ca	apacity(l/cu.ft.)	3	Temperature Range	Remark
	турс	Model	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Upper Storage	Inner Storage Space	Total	Refrigeration Chamber	Remark
		SR-T12EIE	Matel			65					Left-side Grip
Refrige	W1200 / 47.2"	SR-T12EIF	Metal	CTC	1,200X700X850	143		266	266	Control by a single unit	Right-side Grip
ration	Table	SR-T12ESE	STS	STS	47.2"x27.6"x33.5"	62	_	9.4	9.4	(23°F ~ 50°F) (-5°C ~ 10°C)	Left-side Grip
		SR-T12ESF	313			137					Right-side Grip
		SR-T12DIE	Metal	1 200X700X850 148 266 Control b		67					Left-side Grip
0	W1200 / 47.2"	SR-T12DIF	Ivietai		Control by a single unit	Right-side Grip					
Freezer	Table	SR-T12DSE	STS	STS	47.2"x27.6"x33.5"	64	9.4	-	9.4	(-13°F ~ 5°F) (-25°C ~ 15°C)	Left-side Grip
		SR-T12DSF	313			141				,	Right-side Grip

#### \* STS = Stainless Steel

#### STARION W1300 / 51.2" Table Refrigerator



1			Madel	Mate	erial	Dimension	Weight	C	apacity(l/cu.ft.)		Temperature Range	Domasti
		ype	Model	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Upper Storage	Inner Storage Space	Total	Refrigeration Chamber	Remark
			SR-T13EIE	Metal			67					Left-side Grip
	0 04	W1300/51.2"	SR-T13EIF	ivietai	STS	1,300X700X850	148	_	266	266	Control by a single unit (23°F ~ 50°F)	Right-side Grip
	Refrige ration	Table (Customized)	SR-T13ESE	STS	313	51.2"x27.6"x33.5"	64		9.4	9.4	(-5°C~10°C)	Left-side Grip
			SR-T13ESF	313			141					Right-side Grip

#### STARION W1500 / 59.1" Table Refrigerator, Freezer/Refrigerato



	TANKS .	Madal	Ma	terial	Dimension	Weight	Cap	oacity(ℓ/cu	.ft.)	Temperat	ture Range		
	Гуре	Model	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Freezer Chambei	Refrigeration Chamber	Total	Freezer Chamber	Refrigeration Chamber	Remark	
Refrige Refrige	W1500 (50 1 // T.L.	SR-T15EIE	Metal			74 / 163		366	366			0.11.1	
ration ration	W1500 / 59.1" Table	SR-T15ESE	STS			71 /157		12.9	12.9		Control by a single unit	Both doors open	
Freezer Refrige	W1500 / 59.1" Table	SR-T15AIE	Metal	STS	1,500X700X850		Control by a single unit	(23 °F ~ 50 °F) (-5 °C ~ 10 °C)	Dath dass same				
Freezer ration	(Freezer / Refrigeration)	SR-T15ASE	STS	313	59.1"x27.6"x33.5"	76 / 168	6.1	6.1	12.2	(-13 F ~ 5 F) (-25 °C ~ -15 °C)		Both doors open	
0	W1500 / 59.1" Table	W1500 / 59.1" Table SR-T1	SR-T15DIE	Metal			77 / 170	366		366	Control by a single unit		0.0.1
Freezer Freezer	(Freezer / Freezer)	SR-T15DSE	STS			74 / 163	12.9		12.9	(-13°F ~ 5°F) (-25°C ~ -15°C)		Both doors open	

#### STARION W1800 / 70.9" Table Refrigerator, Freezer/Refrigerator



Tuno	Model	Material		Dimension	Weight				Temperat	ure Range	Remark
Туре	Model	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Freezer Chambe	Refrigeration r Chamber	Total	Freezer Chamber	Refrigeration Chamber	Remark
Refrige ration W1800 / 70.9" Table	SR-T18EIE	Metal			89/196		465	465	22		D-11 - 1
ration ration vv 1800 / 70.9 Table	SR-T18ESE	STS	STS	1,800X700X850	86/190		16.4	16.4		Control by a single unit	Both doors open
Refrige W1800 / 70.9" Table	SR-T18AIE	Metal	313	70.9"x27.6"x33.5"	TBD	171.5 2 6.1		443	Control by a single unit	(23°F~50°F) (-5°C~10°C)	
Freezer Refrigeration (Freezer / Refrigeration)	SR-T18ASE	STS			TBD			15.7	(-13°F ~5°F) (-25°C ~-15°C)		Both doors open

### **STARION** | Side-dish Refrigerator










	Туре	Model	Mate		Dimension	Weight		pacity(l/cu.ft.)		Temperature Range	Remark
			External	Internal	(WxDxH)mm/Inch	(kg/lb)	Upper Storage	Inner Storage Space	Total	Refrigeration Chamber	
		SR-V09EIE**	Metal			54					Left-side Grip
9	W900 / 35.4"	SR-V09EIF**	Wetai	STS	900X700X850	119					Right-side Grip
Refrige ration	Side-dish	SR-V09ESE**	CTC	313	35.4"x27.6"x33.5"	51					Left-side Grip
	Refrigerator	SR-V09ESF**	STS			112	62	131	193	Control by a single unit (23°F ~ 50°F)	Right-side Grip
	W1000 / 39.4"	SR-V10EIE**	Moral			56	2.2	4.6	6.8	(-5°C~10°C)	Left-side Grip
Refrige	Side-dish	SR-V10EIF**	Metal	STS	1,000X700X850	123					Right-side Grip
Refrige ration	Refrigerator	SR-V10ESE**	CTC	313	39.4"x27.6"x33.5"	53					Left-side Grip
	(Customized)	SR-V10ESF**	STS			117					Right-side Grip



\* STS = Stainless Steel



1,200	1,200
- 325 7 265	176-
1 700	325 125 1 2 7 2
362.5 14.3" [W1200 / 47.2" / 1/2]	302.5 11.9" [W1200 / 47.2" / 1/3]

	ype	Model	Mat	erial	Dimension	Weight	Ca	apacity(l/cu.ft.)		Temperature Range	Remark	
	ype	Wodel	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Upper Storage	Inner Storage Space	Total	Refrigeration Chamber	Remark	
		SR-V12EIE**	Metal			65					Left-side Grip	
	W1200 / 47.2"	SR-V12EIF**	Metal			143	86	209	295		Right-side Grip	
	Side-dish Refrigerator	erator SR-V12ESE**	STS			62	3.0	7.4	10.4		Left-side Grip	
O Defries		SR-V12ESF**	313		1,200X700X850	137				Control by a single unit	Right-side Grip	
Refrige ration	W1200 / 47.2"	SR-V12EIEVB**	Metal	STS		1,200X700X850 47.2"x27.6"x33.5"	67 148				(23°F~50°F)	Left-side Grip
-	1/2 Side-dish Refrigerator	SR-V12ESEVB**	STS		47.2 X27.0 X33.3	64 141				(-5°C~ 10°C)	Left-side Grip	
		SR-V12EIEVA**				67	55	209	264		Left-side Grip	
	W1200 / 47.2"	SR-V12EIFVA**	Metal				148	1.9	7.4	9.3		Right-side Grip
	1/3 Side-dish Refrigerator	SR-V12ESEVA*				64					Left-side Grip	
	nemgerator	SR-V12ESFVA**	STS			141					Right-side Grip	



	T-1	2250	Model	Mat	terial	Dimension	Weight	C	apacity(ℓ/cu.ft.)		Temperature Range	Remark
	ıyı	pe	Model	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Upper Storage	Inner Storage Space	Total	Refrigeration Chamber	Remark
			SR-V13EIE**	Metal			67					Left-side Grip
0		W1300 / 51.2" Side-dish	CD 1/12CIC**	Wetai	STS	1,300X700X850	148	86	209	295	Control by a single unit	Right-side Grip
	Refrige ration	Refrigerator	SR-V13ESE**	STS	313	51.2"x27.6"x33.5"	64	3.0	7.4	10.4	(23°F ~ 50°F) (-5°C ~ 10°C)	Left-side Grip
-		(Customized)	SR-V13ESF**				141				Abasa saast	Right-side Grip



325
265 104° 700 1 276'
362.5 (4.3" [W1500 / 59.1" / 1/2]

302.5 11.9 11.9 11.9 11.9 11.9 11.9 11.9 11		emperature Range efrigeration Chamber	Remark
	IJ		/ 1/3)

	Туре		Model	Material		Dimension	Weight	Capacity(l/cu.ft.)			Temperature Range	Remark	
ш		туре		Model	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Upper Storage	Inner Storage Space	Total	Refrigeration Chamber	nemark
			W1500 / 59.1"	SR-V15EIE **	Metal			74/163	109	287	396		
		Side-dish Refrigerator	SR-V15ESE **	STS			71 / 157	3.8	10.1	13.9			
į.	0		W1500 / 59.1"	SR-V15EIEVB **	Metal	STS	1,500X700X850	76 / 168	58			Control by a single unit (23°F ~ 50°F)	Both doors open
- 1	Refrige ration	Refrige ration	1/2 Side-dish Refrigerator	SR-V15ESEVB **	STS	313	59.1"x27.6"x33.5"	73 / 161	71	287	358	(-5℃~10℃)	Botti doors open
- 3		_	W1500 / 59.1"	SR-V15EIEVA **	Metal			76 / 168	2.5	10.1	12.6		
			1/3 Side-dish Refrigerator	SR-V15ESEVA **	STS			73 / 161					

#### W1800 / 70.9" Side-dish Refrigerator



Turno		Model	Material		Dimension	Weight	Capacity(ℓ/cu.ft.)			Temperature Range	Remark
15	Type W1800/70.9" Side-dish	Model	External	Internal	(WxDxH)mm/Inch	(kg/lb)	Upper Storage	Inner Storage Space	Total	Refrigeration Chamber	nemark
Refrine Refrine		SR-V18EIE**	Metal	crc	1,800X700X850	89 / 196	132	365	497	Control by a single unit (23°F~50°F)	Both doors open
ration ration	Refrigerator	SR-V18ESE**	STS	STS	70.9"x27.6"x33.5"	86 / 190	4.7	12.9	17.6	(23 F ~ 50 F) (-5 ℃~ 10℃)	Botti doors open

06 | Side-dish Refrigerator Side-dish Refrigerator | 07

### **STARION** | Dishwasher · Airo Cook







Made and assembled with the same material (stainless steel), it is completely free from any




Standard Period: 70 seconds







								Rinse: 12 sec.	sec., Pause: 3 sec )The time for was djustable subject reference.	hing to	s superb dürabilit o detergents instea prevents mechanic ses proper volum	id of a roll pump, al failures since it				
	22000	W. C. L.	Dimension		Max. Power			Cleaning/	Rinse	_		Cleani	ng Capa	city (per hou	ır)	
Type	Model	weight	Weight	(WxDxH)mm	Voltage	Usage	Type	Tank Capacity	Cleaning/Rinse Time	Pump Capacity	Hot Water	Max. Temperature	Small & medium sized dishes	bowls	Large bowls	Cups
Dishwasher	SW-D500C	81Kg 176lb	With door closed 650x650x1,350 25.6"x25.6"x53.1"	220V~, 60Hz	3.8 kW	Spraying type with upper/	Cleaning 42 g / 1,522 oz	Cleaning: 35-95 seconds (set by a unit of 5 seconds)	Cleaning: 1.1 kW	х	Cleaning 85°C / 185°F ± 10%	1,500	1,500	360	2,000	
	SW-D500H	85 Kg 187lb	With door open 650x650x1,800 25.6"x25.6"x70.9"	Single Phase	5 kW	lower rotation	Rinse 28 Ø / 947 oz	Rinse: 5~30 seconds (set by a unit of 1 second)	Rinsing: 0.1 kW	0	Cleaning · Rinsing 85°C / 185°F ±10%	1,800 (EA)	(EA)	480 (EA)	(EA)	

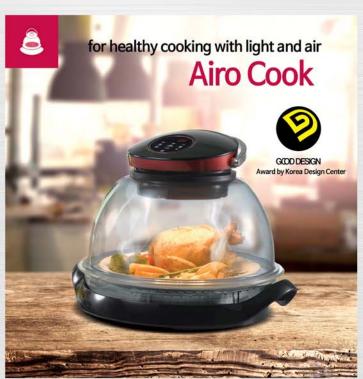



#### Eco-friendly

TPX material, eco-friendly new material, is used.Zero occurrence of endocrine disruptor



Safety for cooking further enhanced through quintuplex safety device: Safety grip (ON/OFF) feature, mechanical overheating-prevention feature, power suppression unit through separation of body and bowl, motor overheating-prevention feature, PCB overheating-prevention feature.



#### Massive Capacity

Capable of cooking a large volume at once with massive 14.5L cooking space



Latest technology of LED touch panel applied: Time adjustable by minutes/temperature adjustable by 5 degrees:Easy-and-convenient handling through TPX material.

Туре	Model	Power Consumption	Dimension (WxDxH)mm/inch	Bowl Capacity	Rated Voltage	Weight	Safety Feature
Airo Cook	STO-1200	Halogen lamp/1,200W	375x360x375 14.8"x14.4"x14.8"	14.5L / 490 oz	220V / 60Hz	Approx. 5kg/11 lb	Quintuplex safety device





#### Shining & Stylish Kitchen

World-recognized SCHOTT Glass; Superb durability & thermal efficiency



#### Slice & Direct Touch

Easy-to-use through hand pressing and light touch



#### German-made E.G.O heating element

3~5 seconds of heating velocity, suppression of nutrient destruction at 650℃-700℃



#### **Smart Safety Features**

Accident prevention through safety features such as child-proof lock, automatic power-off & automatic shut-down



Dual Burner w/ Expanded Crater

More convenience accommodating containers in all sizes



**Easy Cleaning** 

World-recognized SCHOTT Glass: Superb durability & thermal efficiency

08 | Dishwasher · Airo Cook Electric Stove | 09

### **STARION** | Hybrid · Highlight Electric Stove



#### SE-JB652SFC

- NEG Glass Top Plate, one of the world's Top 3 glasses
- CERAMA SPEED far-infrared radiant heating elements, the best heating element of the U.S.
- Dual burner with expanded crater
- Induction boost function (2,000W, the highest output in Korea) Slide & direct touch



Induction suitable to dishes requiring quick and high temperature cooking



Highlight suitable to guick cooking for all containers

# **Highlight Electric Stove** MADE IN GERMANY, German High-end Brand SCHOTT-CERAN Ceramic Glass Top Plate

#### SE-HLP63SIA

- German-made high-end SCHOTT SERAN Glass
- German-made high-end E.G.O Heating Element
- · Dual burner with expanded crater
- · Slide & direct touch




German-made SCHOTT top plate German-made E,G,O heating element



Slide & Direct Touch

### **STARION** | Highlight · Induction Electric Stove



Modern & Simple Electric Stove SE-JL642TFB



- · NEG Glass Top Plate, one of the world's Top 3 glasses
- · CERAMA SPEED far-infrared radiant heating elements, the best heating element of the U.S
- Dual burner with expanded crater
- child-lock feature
- · Automatic Power Shut-off



**Highlight Electric Stove** SE-JC642TKB




- · Ceramic glass top plate that is powerful and easy to clean
- · Highlight heating elements emitting healthy far-infrared radiation
- · Dual burner with expanded crater
- child-lock feature
- · Automatic Power Shut-off



#### Portable Extended Crater Highlight SE-JL122HCCH







- · Highlight electric stove with eco-friendly far-infrared radiation
- · Suitable to places requiring quick-and-easy cookware
- · Portable & Easy-to-store
- $\cdot$  It works with all containers. Easier and more convenient cooking
- · 8-level temperature control by soft touch and timer feature
- · Safety device for over-heating prevention



Induction Electric Stove with Highest Output in Korea STI2100-WBW





- · 15-level burner control
- · Stylish WHITE GLASS HIDDEN LED
- timer, rapid heating, heat retaining and child-lock functions
- · Overheating-prevention safety device, automatic power shut-off
- · Suitable to places requiring quick-and-easy cookware
- · Portable & Easy-to-store

#### Healthier, Easier and Safer with STARION Electronic Stove



Time and energy consumed to heat up 1L, 33.8oz of water Rise Time (25°C ~ 100°C / 77°F ~ 212°F)

#### Less burdens on electricity bill but with more satisfaction!

Assessment standards for electricity bills

337kwh of Average monthly electricity bill for 4 people per family (Data from the Ministry of Trade, Industry and Energy and Korea Energy Management Corporation, in 2011)

■ Comparative Standards (progressive tax applied)

1 soup, 2 side dishes heated once for each 2L of water heated in 2 craters twice (a total of 6 times of heating)

lyment to use a gas stove USD 7,6 for additional month

Economic and efficient kitchen

# Distinctive Strength of Electric Stove / No gas explosion! No toxic gas! Easy-to-Use!





Try an electric stove for healthy air in the kitchen,

10 | Hybrid · Highlight Electric Stove Highlight · Induction Electric Stove | 11

### STARION | Rotary Heater





#### 43m² SH-R06SCH

#### Chic Brown / Evaporative High Pressure Discharge Ignition

· Heating Value: 6,500 Kcal/h · Tank Capacity: 16.5 € /558oz Fuel Consumption: 0.78(I/h)/26.4(oz/h) during high combustion Dimension (WxDxH): 441x541x700mm 17,4"x21.3"x27.6"

Weight: 19.5 kg/43 lb Power Consumption: 30W(during combustion)







-

#### 43m² SH-R06SBH

#### La Mer Blue / Evaporative High Pressure Discharge Ignition

Heating Value: 6,500 Kcal/h Tank Capacity: 16.5 g /558oz Fuel Consumption: 0.78(I/h)/26.4(oz/h) during high combustion

Dimension (WxDxH): 441x541x700mm 17.4"x21.3"x27.6"

Chic Brown / Rotary Atomizing High Pressure

Fuel Consumption: 1.35(I/h)/45.6(oz/h)

Power Consumption: 32W (during combustion)

Dimension (WxDxH): 473x574x785mm

during high combustion

18.6"x22.6"x30.9"

· Heating Value: 11,500 Kcal/h

· Tank Capacity: 20 @ /676oz

Weight: 23.5 kg/52 lb

Veight: 19.5 kg/43 lb Power Consumption: 30W (during combustion)



SH-R11SCH

79m²





#### Weight: 19.5 kg/43 lb Power Consumption: 30W (during combustion)

56m²

SH-R08SCH

Discharge Ignition

Chic Brown / Evaporative High Pressure

· Fuel Consumption: 0.97(I/h)/32.8(oz/h)

- Dimension (WxDxH) : 441x541x700mm 17.4"x21.3"x27.6"

during high combustion

· Heating Value: 6,500 Kcal/h

· Tank Capacity: 16.5 @ /558oz



#### 102m² SH-R15SCH

#### Chic Brown / Rotary Atomizing High Pressure

--

Heating Value: 15,000 Kcal/h Tank Capacity: 20 ₽ /676oz

Fuel Consumption: 1.8(I/h)/60.9(oz/h) during high combustion Dimension (WxDxH): 473x574x785mm 18.6"x22.6"x30.9" Weight: 23.5 kg/52 lb



# 56m²

Ignition safety device

Preventive device for excessiv room temperature rise

Safety device for power outage

Combustion control system

#### SH-R08SBH

#### La Mer Blue / Rotary Atomizing High Pressure

Heating Value: 8,000 Kcal/h Tank Capacity: 16.5 € /558oz Fuel Consumption: 0.97(I/h)/32.8(oz/h) during high combustion

Dimension (WxDxH): 441x541x700mm 17.4"x21.3"x27.6" Weight: 19.5 kg/43 lb Power Consumption: 35W (during combustion)



Safer than ever! 11 safety features,

the most ever in Korea (applicable to all models)

Motor protection device Impact fire extinguisher

3-hour automatic 3 fire extinguisher



### Korea's first-ever far-infrared





Display of target temperature, 14-level temperature control system (All other products are featured with 7 levels or less) Automatic heating control / one-touch automatic operation feature

### STARION | Air Heater

### Stronger Durability Durable hot air blower that last longerFrom tiny office to spacious factory A variety of product groups 79.2m<sup>1</sup> 82.5m<sup>2</sup> 102m<sup>2</sup> 139m<sup>2</sup>

#### Much stronger! Best Efficiency!



Emission gas, NOx (nitrogen oxide) improved by 20% through improvement of burner performance

efficiencyis im proved by 20% of BAFFLE

highly-visible under all working environments controls of all models





#### 82.5m² SH-F09SIH

#### Warm Grey / Remote Control

- · Heating Value: 9,000 Kcal/h
- · Tank Capacity: 30 @ /1,014oz
- · Fuel Consumption : 1.0(I/h)/33.8(oz/h) during high combustion

79.2m²

SH-F09CRH

- · Dimension(WxDxH): 950x350x960mm
- · Weight: 46 kg/101 lb
- · Power Consumption: 70W (during combustion)



#### 82.5m² SH-F09SIH

#### Warm Grey / Remote Control

Heating Value: 9,000 Kcal/h Tank Capacity: 30 € /1,014oz Fuel Consumption: 1.0(I/h)/33.8(oz/h) during high combustion

 Dimension (WxDxH): 950x350x960mm 37.4\*x13.8\*x37.8\* Weight: 46 kg/101 lb


Power Consumption: 70W (during combustion)



# during high combustion

79.2m²

SH-F09CIH





#### Wine Red/Remote Control

Heating Value: 9,000 Kcal/h Heating Value: 9,000 Kcal/h Tank Capacity: 25 @ /845oz Tank Capacity: 25 @ /845oz Fuel Consumption: 0.97(I/h)/32.8(oz/ Fuel Consumption: 0.97(I/h)/32.8(oz/h) during high combustion Dimension (WxDxH): 800x350x960mn Dimension (WxDxH): 800x350x960m

> · Weight: 45 kg/99 lb Power Consumption: 70W (during combustion)



#### 102m² SH-F11SSH

#### Silver Pearl / Remote Control

· Heating Value: 11,000 Kcal/h Tank Capacity: 30 ℓ /1,014oz Fuel Consumption: 1.2(I/h)/40.6(oz/h) during high combustion - Dimension (WxDxH) : 950x390x1,070mm 37.4\*x15.4\*x42.1\*

Weight: 51.5 kg/114 lb Power Consumption: 70W (during combustion)



## SH-F15SIH

139m²

#### Warm Grey / Remote Control Heating Value: 15,000 Kcal/h

· Tank Capacity: 30 l /1,014oz Fuel Consumption: 1.75(1/h) / 59.2(oz/h) during high combustion Dimension (WxDxH): 1,150x350x1,280mn 45.3\*x13.8\*x50.4\*

Weight: 64 kg/141 lb Power Consumption: 70W (during combustion)



### the most ever in Korea (applicable to all models)





#### Fuel efficiency improved by 20% through the application of BAFFLE, STARION's own technology More efficiency, less burden on household expenditures




#### High efficiency heating concept of hot air blower



This product is suitable to places where heating efficiency is low with conventional heaters because of wide area and high ceiling.

#### Applicable use of far-infrared radiant hot air blower







12 | Rotary Heater

# STARION



#### A company specialized in comprehensive home appliances

#### **Quality Control**

The company manufactures products close to and in direct contact with people based on technologies manufacturing the most reliable refrigerators with the highest quality in the industry.

#### Stay close to daily life for 50 years

STARION is a professional brand dedicated to developing core technologies for home electronics, precision manufacturing, information & communication and automotive parts in order to bring happiness to daily lives throughout all facets of life.

#### **Customer Satisfaction**

STARION is determined to ensure customer satisfaction at all times for the sake of customers' happiness as it always has by staying close to daily lives of all customers.



#### 1960'S

1965 ·Sung Chull MFG



·Steering wheel for

1970'S

·Refrigerator evaporator manufactured

OEM products

(gasoline stove

electric stove)

1976



#### 1980'S

1985 ·Honored with the Order of Steel Tower Industry Changwon Factory of Sung Chull MFG completed ·KS for gas stove & gas range



acquired

1986 Wonwoo Precision Co., Ltd. established (manufacturing components of LCD & ODD)



#### 1990'S

1991 Kiwon Co., Ltd. established (manufacturing evaporator for refrigerator)

1992 Hana Co., Ltd. established (manufacturing wire condenser for refrigerator



1993 ILWOO Precision Co. Ltd established

#### 1996

·Local corporation established in Indonesia

1999



·Local corporation established in the U.S. and Mexico

#### 2000'S

2000 ·Local corporation established China



2001 ·Local corporation established in India · Electric fan under original brand launched ·Honored with 20 million **Export Towers** 

2002 ·Local corporation established

2006

#### 2014


Airo Cook electric

·Local corporation established in Huizhou, China ·Local corporation established



2003

2005 ·Local corporation established in Taizhou, China



·Reynosa established

#### 2015

· STARION commercial



·air purifier ·Honored with Red Dot Concept Award Steering wheel supplied for Tivoli of SsangYong





2016년

Company History | 15

Our Heritage